


DL-2007A

测程测量精度 (每公里往返测标准差)	0.7mm	补偿器	±15'
	1.5mm		0.3"/1
距离测量精度	D ≤ 10m: 10mm; D > 10m: D * 0.001	数据存储	30000
测程	1.8-110m		/
最小显示	0.01mm/0.1mm/1mm	圆水准器灵敏度	U
	1mm		8'/2mm
测量时间	3	自动断电	5 / OFF
望远镜	/	水平度盘	1' / 1gon
	0.6m	显示器	2.7" / 160°/96
	32x	工作温度	-20°C - 50°C
	3"	尺寸与重量	230mmx240mmx200mm
	1°30'		2.5kg
	100		IP65
	0		



(020)85628528

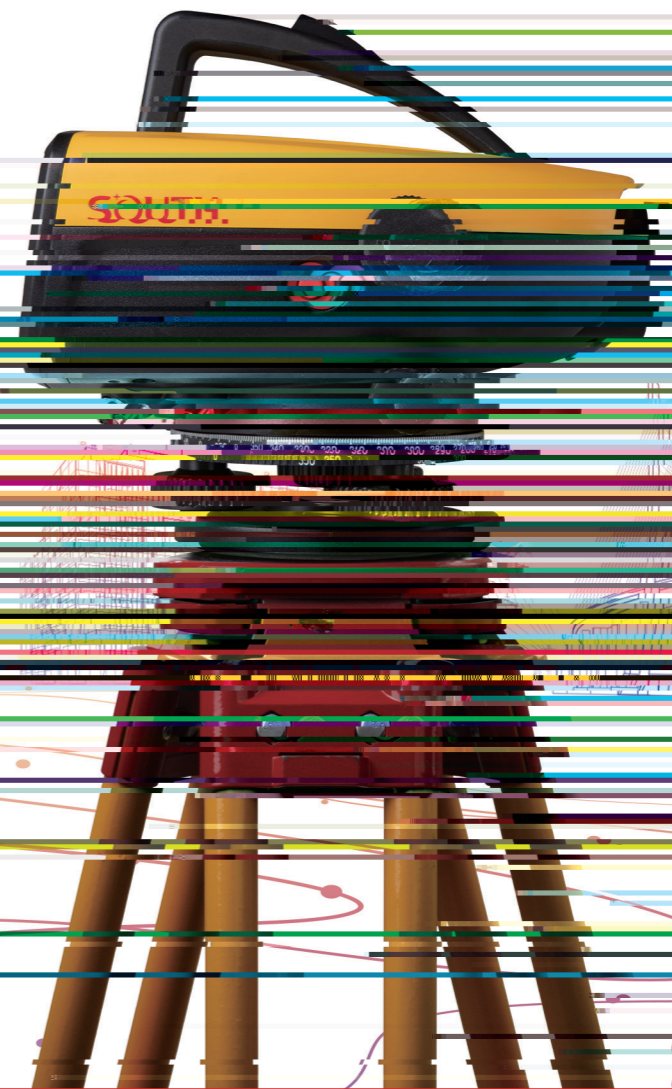