

配置	详细指标
	BDS- :B I B I B I BDS- :B I B I B C B a B b GPS:L C/A,L P,L C,L ,L C* GLONASS:G ,G ,G * Galileo E ,E b,E a,E AltBoc*,E c* SBAS L C/A,L * OZSS L L C L IRNSS L *
GNSS	Hz Hz . % GNSS
GNSS	, . mm+ . " " D , mm+ . " " D D mm , mm+ " " D , mm+ " " D D mm
/	IMU ° ° . RMS mm + . mm/°tilt tilt IMU HZ
/	Linux
/	wed Web UI Wi-Fi USB Web UI iVoice OpenSIC
/	mm" mm . KG
/	°C + °C °C + °C % m IP IP - V . V mAh/
I/O	LEMO +RS Type-C Micro SIM - MHz Farlink FarlinkPro SOUTH TrimTalk S ZHD HUACE
G	Linux PPP CORS G BT . BR/EDR+BLE
NFC	NFC NFC
WiFi	. b/g/n WiFi WiFi WiFi WiFi
/	G () Hz NMEA PJK STH Rinex . Rinex . VRS FKP MAC NTRIP RTCM . RTCM . GPS




510663

400-7000-700
全国统一服务热线

科力达RTK



非凡性能, 开机秒固定

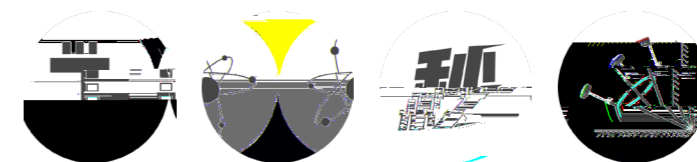

全能慧联

精微设计

- 8Sd[]
- 1_ 1_
- 8Sd[]

- 9
- >[gj BBB 9
- 5ADE
- ž T!Y! I ;8

- 4F ž 4D!76DŁ4>7



智能服务



- 1
- DF=
- 9 / fi
- EF: D[W] z
- D[W] z : l
-

-
-
-

